



ENERG
енергия · ενεργεια




HPA-O 17.2 Trend HC 400

STIEBEL ELTRON



55 °C

35 °C

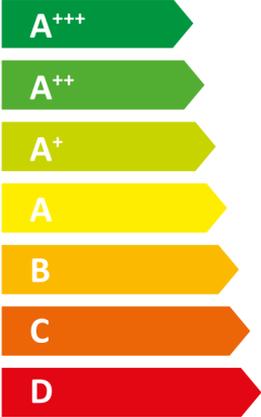

- dB

52 dB

■ 20	■ 19
■ 20	■ 20
■ 10	■ 11
kW	kW

2019

811/2013


Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		HPA-O 17.2 Trend HC 400
		207426
Manufacturer		STIEBEL ELTRON
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)		A+++
Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)		A+++
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	20
Rated heating output under average climate conditions for low-temperature applications (P rated)	kW	20
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	150
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications (η_s)	%	179
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	10918
Annual energy consumption under average climate conditions for low-temperature applications (QHE)	kWh/a	9216
Sound power level, indoor		-
Option for operation only at off-peak times		-
Special measures	Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung	
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	20
Rated heating output under colder climate conditions for low-temperature applications (P rated)	kW	19
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	10
Rated heating output under warmer climate conditions for low-temperature applications (P rated)	kW	11
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (η_s)	%	138
Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications (η_s)	%	162
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (η_s)	%	190
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	257
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	14219
Annual energy consumption under colder climate conditions for low-temperature applications (QHE)	kWh/a	11452
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	3062
Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)	kWh/a	2114
Sound power level, outdoor	dB(A)	52



ENERG

енергия · ενέργεια

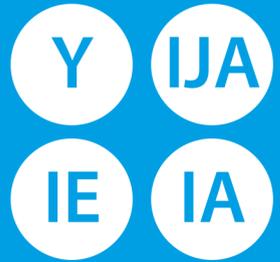


HPA-O 17.2 Trend HC 400

STIEBEL ELTRON





+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>




Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		HPA-O 17.2 Trend HC 400
		207426
Manufacturer		STIEBEL ELTRON
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications (η_s)	%	179
Temperature control class		IV
Contribution of temperature control to space heating energy efficiency	%	4
Space heating energy efficiency of package under average climate conditions	%	154
Space heating energy efficiency of package under colder climate conditions	%	142
Space heating energy efficiency of package under warmer climate conditions	%	194
Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions	%	12
Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions	%	40
Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)		A+++
Space heating energy efficiency class of package under average climate conditions (A+++ -> D)		A+++

Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		HPA-O 17.2 Trend HC 400
		207426
Manufacturer		STIEBEL ELTRON
Heat source		Luft
Low temperature heat pump		-
With auxiliary heater		-
Combination heater with heat pump		-
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	20
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	20
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	10
Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	12.3
Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)	kW	17.9
Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)	kW	7.5
Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)	kW	10.8
Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	11.1
Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	5.2
Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)	kW	7
Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	7.2
Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)	kW	6.1
Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)	kW	6
Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	5.9
Tj = dual mode temperature under colder climate conditions (Pdh)	kW	16.6
Tj = dual mode temperature under average climate conditions (Pdh)	kW	17.9
Tj = dual mode temperature under warmer climate conditions (Pdh)	kW	11.1
Tj = operating temperature limit under colder climate conditions (Pdh)	kW	13.8
Tj = operating temperature limit under average climate conditions (Pdh)	kW	17.5
Tj = operating temperature limit under warmer climate conditions (Pdh)	kW	11.1
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	16.6
Dual mode temperature under colder climate conditions (Tbiv)	Grad C	-15
Dual mode temperature under average climate conditions (Tbiv)	Grad C	-7
Dual mode temperature under warmer climate conditions (Tbiv)	Grad C	2
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)	%	138
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs)	%	150
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)	%	190
Tj = -7 °C COP, partial load range under colder climate conditions (COPd)		2.8
Tj = -7 °C COP, partial load range under average climate conditions (COPd)		2.3
Tj = 2 °C COP, partial load range under colder climate conditions (COPd)		4.2
Tj = 2 °C COP, partial load range under average climate conditions (COPd)		3.6
Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)		2.9
Tj = 7 °C COP, partial load range under colder climate conditions (COPd)		6.1
Tj = 7 °C COP, partial load range under average climate conditions (COPd)		5.5

Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)		4.2
Tj = 12 °C COP, partial load range under colder climate conditions (COPd)		7.2
Tj = 12 °C COP, partial load range under average climate conditions (COPd)		7
Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)		6.1
Tj = dual mode temperature under colder climate conditions (COPd)		2.2
Tj = dual mode temperature under average climate conditions (COPd)		2.3
Tj = dual mode temperature under warmer climate conditions (COPd)		2.9
Tj = operating temperature limit under colder climate conditions (COPd)		1.8
Tj = operating temperature limit under average climate conditions (COPd)		2.2
Tj = operating temperature limit under warmer climate conditions (COPd)		2.9
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		2.2
Operating temperature limit under colder climate conditions (TOL)	Grad C	-22
Operating temperature limit under average climate conditions (TOL)	Grad C	-10
Operating temperature limit under warmer climate conditions (TOL)	Grad C	2
Operating temperature limit of heating water under colder climate conditions (WTOL)	Grad C	75
Operating temperature limit of heating water under average climate conditions (WTOL)	Grad C	75
Operating temperature limit of heating water under warmer climate conditions (WTOL)	Grad C	75
Power consumption, off-mode (Poff)	Watt	13
Power consumption, thermostat off-mode (PTO)	Watt	22
Power consumption, standby state (PSB)	Watt	13
Power consumption, operating state, with crankcase heating (PCK)	Watt	0
Rated heating output of auxiliary heater under colder climate conditions (PSUP)	kW	6.5
Rated heating output of auxiliary heater under average climate conditions (PSUP)	kW	2.7
Rated heating output of auxiliary heater under warmer climate conditions (PSUP)	kW	0
Type of energy supply, auxiliary heater		elektrisch
Output control		veränderlich
Sound power level, outdoor	dB(A)	52
Sound power level, indoor		-
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	14219
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	10918
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	3062
Flow rate on heat source side	m ³ /h	7120
Special measures	Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung	