




**ENERG**  
енергия · ενεργεια




HPA-O 10.2 W Plus HC 400

**STIEBEL ELTRON**



55 °C

35 °C

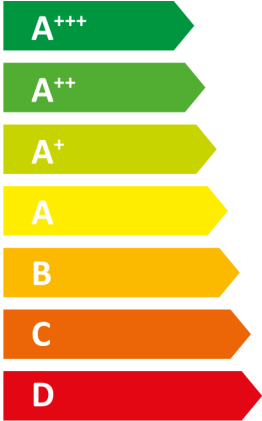

- dB

**46 dB**

■ 11	■ 11
■ 12	■ 12
■ 6	■ 6
kW	kW

2019

811/2013


**Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

		<b>HPA-O 10.2 W Plus HC 400</b>
		208434
Manufacturer		STIEBEL ELTRON
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)		A+++
Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)		A+++
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	12
Rated heating output under average climate conditions for low-temperature applications (P rated)	kW	12
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ )	%	157
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications ( $\eta_s$ )	%	195
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	5951
Annual energy consumption under average climate conditions for low-temperature applications (QHE)	kWh/a	4855
Sound power level, indoor		-
Option for operation only at off-peak times		-
Special measures	Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung	
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	11
Rated heating output under colder climate conditions for low-temperature applications (P rated)	kW	11
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	6
Rated heating output under warmer climate conditions for low-temperature applications (P rated)	kW	6
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications ( $\eta_s$ )	%	143
Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications ( $\eta_s$ )	%	175
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications ( $\eta_s$ )	%	180
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )	%	248
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	7499
Annual energy consumption under colder climate conditions for low-temperature applications (QHE)	kWh/a	6274
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	1792
Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)	kWh/a	1262
Sound power level, outdoor	dB(A)	46






# ENERG





енергия · ενέργεια



HPA-O 10.2 W Plus HC 400

## STIEBEL ELTRON

+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>




**Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

		<b>HPA-O 10.2 W Plus HC 400</b>
		208434
Manufacturer		STIEBEL ELTRON
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications ( $\eta_s$ )	%	195
Temperature control class		IV
Contribution of temperature control to space heating energy efficiency	%	4
Space heating energy efficiency of package under average climate conditions	%	161
Space heating energy efficiency of package under colder climate conditions	%	147
Space heating energy efficiency of package under warmer climate conditions	%	184
Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions	%	14
Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions	%	23
Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)		A+++
Space heating energy efficiency class of package under average climate conditions (A+++ -> D)		A+++

**Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

		<b>HPA-O 10.2 W Plus HC 400</b>
		208434
Manufacturer		STIEBEL ELTRON
Heat source		Luft
Low temperature heat pump		-
With auxiliary heater		-
Combination heater with heat pump		-
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	11
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	12
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	6
Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	6.8
Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)	kW	10.2
Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)	kW	4.1
Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)	kW	6.2
Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	6.1
Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	3.8
Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)	kW	3.9
Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	3.9
Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)	kW	4.4
Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)	kW	4.4
Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	4.3
Tj = dual mode temperature under colder climate conditions (Pdh)	kW	9.1
Tj = dual mode temperature under average climate conditions (Pdh)	kW	10.2
Tj = dual mode temperature under warmer climate conditions (Pdh)	kW	6.1
Tj = operating temperature limit under colder climate conditions (Pdh)	kW	6.7
Tj = operating temperature limit under average climate conditions (Pdh)	kW	9.5
Tj = operating temperature limit under warmer climate conditions (Pdh)	kW	6.1
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)		-
Dual mode temperature under colder climate conditions (Tbiv)	Grad C	-15
Dual mode temperature under average climate conditions (Tbiv)	Grad C	-7
Dual mode temperature under warmer climate conditions (Tbiv)	Grad C	2
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)	%	143
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs)	%	157
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)	%	180
Tj = -7 °C COP, partial load range under colder climate conditions (COPd)		3.1
Tj = -7 °C COP, partial load range under average climate conditions (COPd)		2.6
Tj = 2 °C COP, partial load range under colder climate conditions (COPd)		4.2
Tj = 2 °C COP, partial load range under average climate conditions (COPd)		3.8
Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)		2.9
Tj = 7 °C COP, partial load range under colder climate conditions (COPd)		5.6
Tj = 7 °C COP, partial load range under average climate conditions (COPd)		5.3

Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)		4
Tj = 12 °C COP, partial load range under colder climate conditions (COPd)		6.8
Tj = 12 °C COP, partial load range under average climate conditions (COPd)		6.6
Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)		5.7
Tj = dual mode temperature under colder climate conditions (COPd)		2.5
Tj = dual mode temperature under average climate conditions (COPd)		2.6
Tj = dual mode temperature under warmer climate conditions (COPd)		2.9
Tj = operating temperature limit under colder climate conditions (COPd)		2
Tj = operating temperature limit under average climate conditions (COPd)		2.4
Tj = operating temperature limit under warmer climate conditions (COPd)		2.9
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		-
Operating temperature limit under colder climate conditions (TOL)	Grad C	-22
Operating temperature limit under average climate conditions (TOL)	Grad C	-10
Operating temperature limit under warmer climate conditions (TOL)	Grad C	2
Operating temperature limit of heating water under colder climate conditions (WTOL)	Grad C	75
Operating temperature limit of heating water under average climate conditions (WTOL)	Grad C	75
Operating temperature limit of heating water under warmer climate conditions (WTOL)	Grad C	75
Power consumption, off-mode (Poff)	Watt	13
Power consumption, thermostat off-mode (PTO)	Watt	17
Power consumption, standby state (PSB)	Watt	13
Power consumption, operating state, with crankcase heating (PCK)	Watt	0
Rated heating output of auxiliary heater under colder climate conditions (PSUP)	kW	4.5
Rated heating output of auxiliary heater under average climate conditions (PSUP)	kW	2
Rated heating output of auxiliary heater under warmer climate conditions (PSUP)	kW	0
Type of energy supply, auxiliary heater		elektrisch
Output control		veränderlich
Sound power level, outdoor	dB(A)	46
Sound power level, indoor		-
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	7499
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	5951
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	1792
Flow rate on heat source side	m <sup>3</sup> /h	4600
Special measures	Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung	